



#pa042

Thermostatic rough-in with 2 way diverter

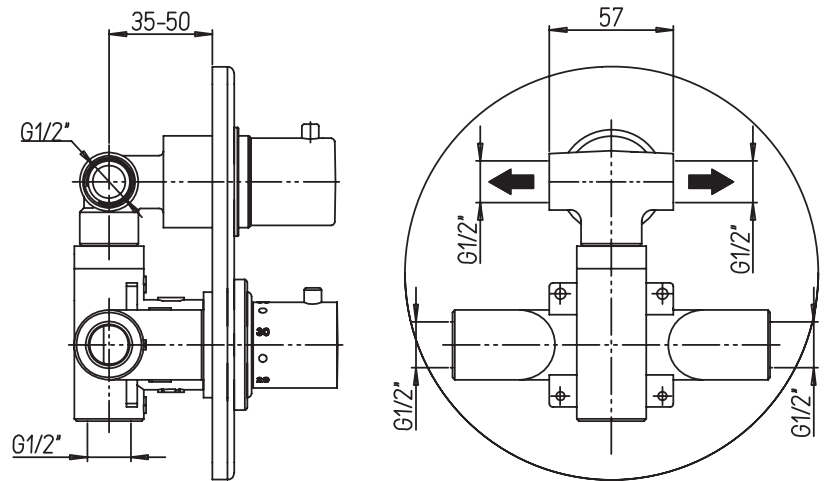

Operates one function at a time
5.6 GPM (21.2 L/min.)
Extension kit available

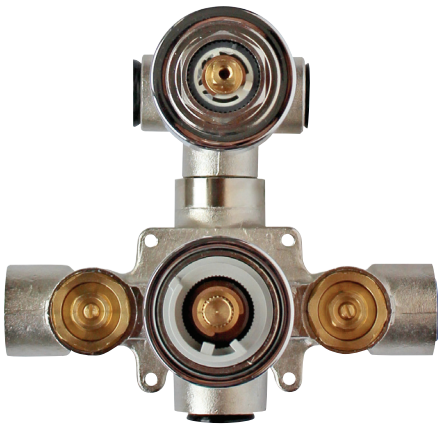