

CaBano

#27311

Floor mount tub filler with hand shower

INSTALLATION GUIDE



Last revision: October 23rd

■ Installation Diagram

Figure 1


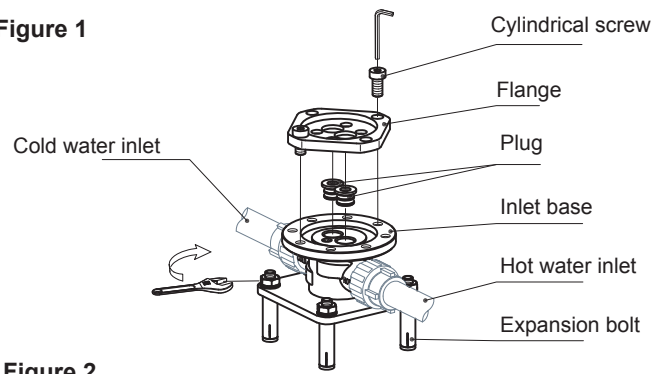


Figure 2

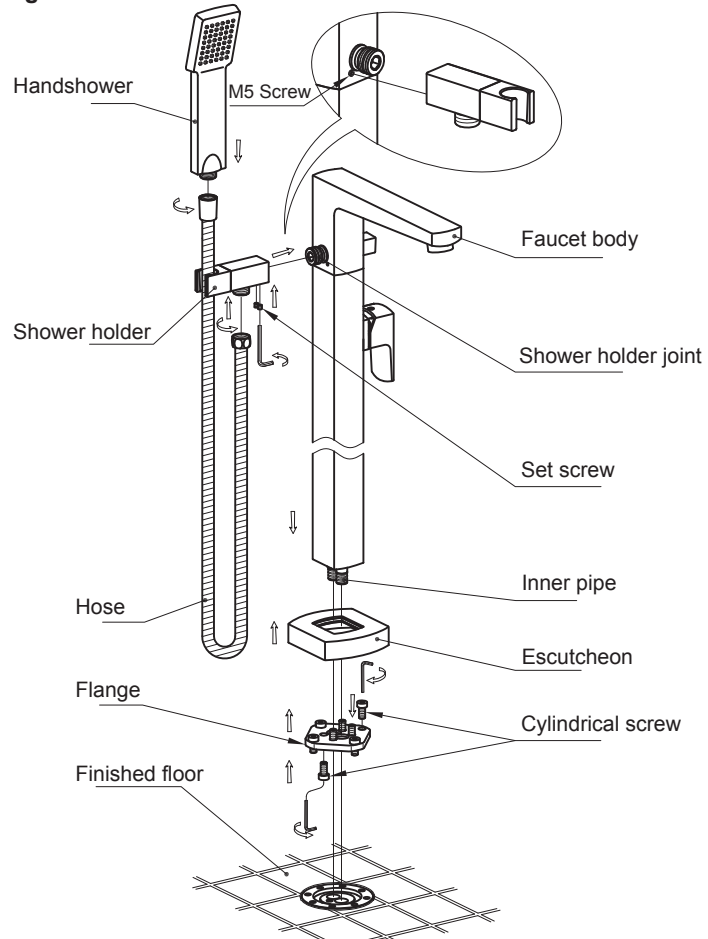

* The installation diagram is only for reference, the product is subject to the real object.

I. Installation Notice

1. Install water pipes in accordance with this manual.
2. Floor drain should be installed in the location of the faucet.
3. Install exposed parts (except inlet base) only after the completion of house interior decoration in case paint or other chemicals erode faucet surface. Before this, do not remove the protection sheath for inlet base.
4. Clean pipes before installation to get rid of mud, sand or other debris.
5. If the thread of pipes don't match well with product, please find out the reason first, otherwise a forced connection will damage the faucet.
6. After installation, check all the joints to ensure they are firmly connected. Then keep water flow. Turn on and off repeatedly to ensure there is no leakage around the joints. At this stage, the product is ready for normal use.
7. Keep the manual to the user.

II. Operation Notice

1. The working condition of this product is water pressure 0.05~1.0MPa, water temperature 4~90°C.
2. Do not hang heavy things on the faucet.
3. Make sure the faucet is off when no water comes out of it (especially when nobody resides in or during the period of decoration or suspend of water).
4. Regularly clean the surface of faucet to keep it bright. Attention: do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or corrosive detergent to clean the faucet, and we do not recommend that you use the detergent sold in the market, because its formula is changing frequently. Please clean the faucet by a wet cotton cloth with soapy water, then rinse and dry with a soft cotton cloth after each time of usage.
5. When the room temperature drops to below 0°C, take necessary measures (such as keeping faucet warm and closing windows) to prevent the faucet from being frozen or even broken (especially when windows kept open for air ventilation while nobody resides in).
6. Please open the cold and hot water in turn and adjust to comfortable temperature before washing to avoid scald.
7. Do not disassemble the product unless you are an expert.

■ Installation Steps

1. As shown in Fig. 1, take 4 mounting holes on inlet base as benchmark to drill holes on the floor (Note: ensure hot water inlet which printed with "HOT" faces to the bathtub). Fix inlet base on the floor with expansion bolt.
2. Pave cold and hot water inlet pipes on the floor and connect to the inlet base. (Note: "HOT" mark for hot water inlet, "COLD" mark for cold water inlet.)
3. Insert plug into outlet of inlet base and tighten it with flange (Note to keep the side with counter bore of flange face upward), run water and keep pressure for 2 hours test, ensure each joint has no leakage occurs. Note: as the product is a built-in valve, do test it well and ensure no leakage before paving floor tiles.
4. Remove flange and plug.
5. Put on protection sheath for paving floor tiles (Note: the height of tiles should be at the same level or a bit higher than the top surface of inlet base. Make edge of tiles along protection sheath for a better appearance).
6. As shown in Fig. 2, put on escutcheon to faucet body carefully to avoid scratch to the surface of faucet body.
7. Remove protection sheath from inlet base and inner pipe, pass flange (keep the side with counter bore back against faucet body) through inner pipe and fix to faucet body firmly with cylindrical screws, insert inner pipe into the outlet of inlet base, connect flange and inlet base with cylindrical screws and fix by allen key.
8. Close escutcheon to floor tiles.
9. Fix shower holder to shower holder joint and tighten with set screw (Note to aim M5 screw on faucet body at the hole of shower holder).
10. Connect handshower and shower holder with hose, run water to check if the installation is qualified.